

NOTES: UNLESS OTHERWISE SPECIFIED

1. BATTERY CONFORMS TO THE REQUIREMENTS OF 14 CFR PART 25.1353.




2. INSPECT PER FAR 21.303(h) QUALITY SYSTEM.

3. ABBREVIATION USED IN TITLE IS: VALVE REGULATED SEALED LEAD ACID (VRSLA).


4. SEE DRAWING NUMBER CB-00242 AND PRODUCTION INSTRUCTION PI-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PRODUCTION INSTRUCTIONS AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
5. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 952-1, UNLESS OTHERWISE NOTED.

6. TERMINAL HARDWARE KIT (CBC PN 9586) CONTAINS M8 HEX HEAD SCREWS AND CONICAL WASHERS.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED 42° CHAMFER TO COVER	1/8/99	JBT
B	REVISED CAPACITY RATES	11/17/99	JBT

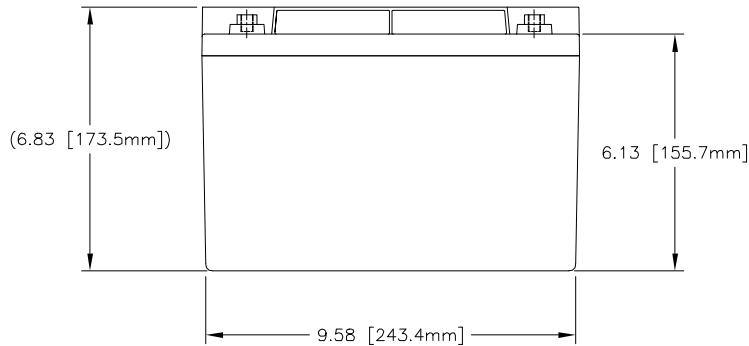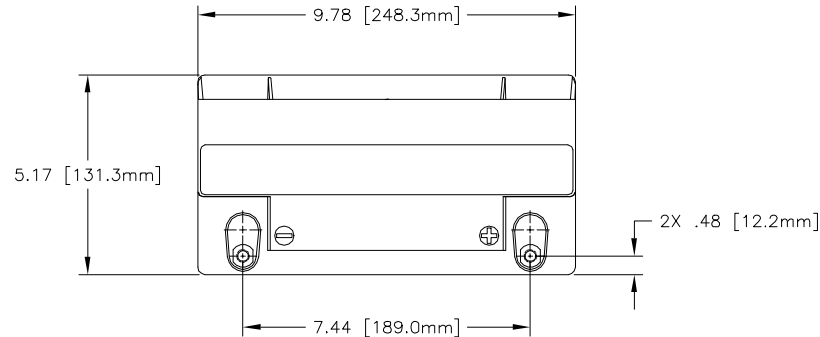

REFERENCE VIEW

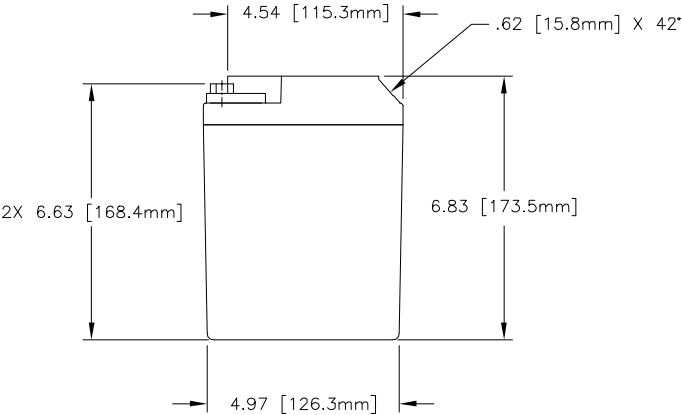

PART NUMBER	RG-35A	RG-35AXC
MAXIMUM WEIGHT	29.5 LBS [13.4 KG]	32 LBS [14.5 KG]
RATED CAPACITY, C ₁	29 AH	33 AH
POWER RATING AT 23°C	lpr 898 A, lpp 1323 A	lpr 1016 A, lpp 1343 A
POWER RATING AT -18°C	lpr 581 A, lpp 1247 A	lpr 718 A, lpp 1297 A
POWER RATING AT -30°C	lpr 407 A, lpp 1010 A	lpr 532 A, lpp 1040 A

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX ± .06 .XXX ± .060			CONTRACT NO.	CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
			APPROVALS	DATE	TITLE
TREATMENT			CHECKED	AMIII	1/22/98
FINISH			APPROVED	JBT	1/22/98
SIMILAR TO			ISSUED	DR	11/23/99
			SCALE	1=2.5	
			SIZE	CAGE CODE	DWG NO.
			C	63017	RG-35A
					REV B
					SHEET 1 OF 1